
Lockable Wall Box with 4 LGX Slots

V.3.1

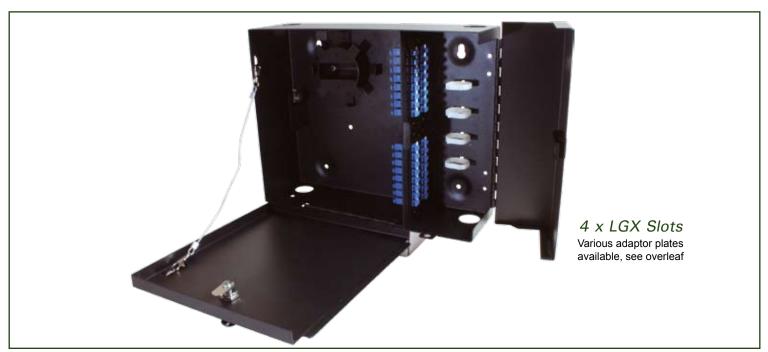

Description

With the ability to use a full array of adapter types this enclosure offers a flexible solution to the end user, enabling them to incorporate a multi functional enclosure that allows easy access during installation or rework with no disturbance of the existing cable or Fibers.

In the addition to the array of adaptors the enclosure also offers multiple cable entry solutions, Fiber cable can be spliced or pre terminated solutions, making this enclosure one of the most flexible on the market.

Features/Benefits

- ► Up to 4 LGX components
- wall mountable
- ► Multiple adapter options available
- ► Splicing option available.
- ► Lockable Hinged door.
- ► Accepts loose tube, distribution cable and
- ► ROHS, REACH SVHC.

Applications

- Data centres, premise installations, telecommunication networks
- ► Ethernet, Fiber Channel, ATM, LAN, MAN and WAN
- ▶ Data communication and telecommunication networks
- ► Indoor applications

Technical Specification

4 Slot Wall Box	
Height	290mm
Width	362mm
Depth	107mm
Net weight	4.6kg
Packaged weight	5.2kg
Packaged dimensions	360mm (W) x 410mm (L) x 160mm (H)
Suitable for Adaptor type	LGX / MTP Cassettes
Number of module positions	4
Material	Cold- rolled steel
Material thickness	2.5mm
Material finish	Powder coating
Colour	RAL 9004
Operating temperature	-40°c to +50°c
Designed in accordance with	TIA/EIA 568.C, ISO/IEC 11801, EN50173, IEC60304, IEC61754,EN297-1
Compliant to	RoHS, Reach/SVHC

Ordering Information

DESCRIPTION	PART NO.
AM Style Lockable Wall Box	FWM-4LGX

For a full range of LGX style connector modules, see overleaf

Adaptor Plates

LGX Style Adaptor Plates



MTRJ

L04